




### CURTAIN



0.5mm continuous brake pressed steel curtain.

### SIZE

	MINIMUM	MAXIMUM
HEIGHT	1200mm	3000mm
WIDTH	2000mm	5500mm

### BOTTOM RAIL

Aluminium bottom rail with weatherseal.

Taper: Optional. To maximum 5500mm (w). Minimum taper ratio is 1:150.

Maximum taper ratio is 1:10, with maximum total taper 250mm.

### GUIDES

Supplied with 50mm galvanised steel guides.

Windlocking: None.

### DRUM

Pressed galvanised metal.

### SPRINGS

Spring life designed for 20,000 cycles.

### OPERATION

Nylofelt® minimises friction, ensures continuous smooth, quiet operation for a minimum of 20,000 cycles.

### MANUAL

- Doors up to 2400mm (h) - with or without hauling chain wheel equipment.
- Doors over 2400mm (h) - direct drive chain equipment.

### AUTOMATED

- GDO-10
- AXESS PRO

### BRACKETS

Hot dipped, galvanised 50mm hot rolled steel.

### LOCKING

Waist high slide bolt locking is located internally and supplied on the left hand side as standard.

### OPTIONS

On wider doors locks are fitted both sides.

Centre lift lock with external key and internal knob operation.

Internal and/or external bottom rail slide bolt locking.

Chain locking. Chain cleat is not lockable.

### FINISHES

Extensive range of standard Colorbond® colours and Zinalume® finish.

### OPTIONS


Ventilation: Optional. Slotted.

Mullions: N/A

Personnel access: N/A

Wicket gates: N/A

### CLEARANCES

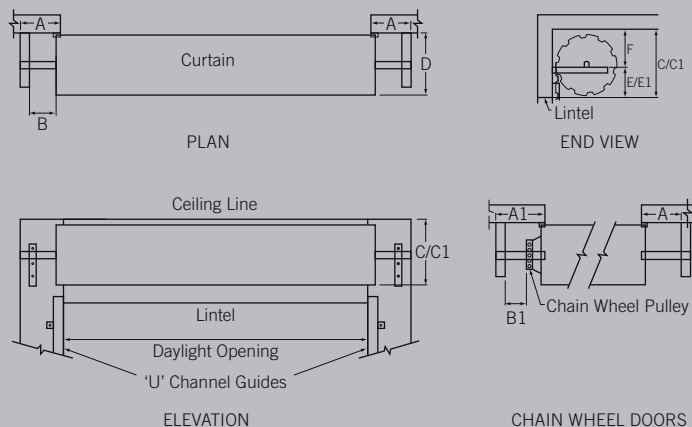

### DIMENSIONS

HEIGHT	A	A1	A1*	B	B1	C	C1	D	E	E1	F
Up to 2400	135	135	195	35	N/A	450	420	540	150	90	300
2401-3050	135	205	195	35	N/A	450	420	540	150	120	300
3051-3300	135	205	195	35	5	460	430	560	150	120	310
3301-3600	135	205	195	35	5	460	N/A	560	150	N/A	310

