Industrial Sectional P7 INDUSTRIAL (P7)









Aluminium sectional door suitable for applications such as factory and warehouse, underground carparks, residetial and commercial developments.

PANEL





 $1.5 \, \mathrm{mm}$, box shaped aluminium extruded frame, screwed together. Range of insert options available.

Panels assembled with galvanised hinges and hangers.

SIZE

1370mm to 4500mm (h) and 1800mm to 7620mm (w). Reinforcing on doors over 3800mm wide.

BOTTOM RAIL

Aluminium bottom rail with weatherseal.

Taper: Optional. Fixed tapers 20mm-70mm. Hinged tapers 80mm-460mm.

GUIDES

Supplied with track 1.5mm Galvabond® Z250 guides. Windlocking: No.

SPRINGS

Spring life 20,000 cycles.

OPTIONAL: High cycle springing for frequent use applications.

NPFRATION

Doors can be operated manually or electrically operated.

LOCKING

Locking not supplied as standard, but available as an option.

LIFTING SYSTEMS

Standard

Low Headroom Independent Single Track

Low Headroom Independent Double Track

Low Headroom Front & Rear Mount Double Track

Low Headroom Double Track Follow the roof

Stand Headroom Independent

Rear Torsion

Standard headroom follow the roof

Vertical lift

High lift


High lift follow the roof

FINISHES

Frame and inserts available in aluminium finish or powder coated.

INSERT OPTIONS

Mini corrugated steel

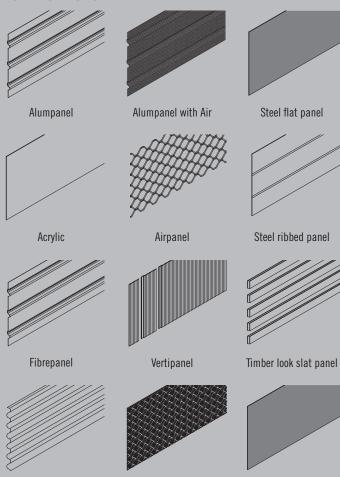

Aluminium checker plate

Timber look steel panel

